





PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Lucky	11/27/17'




1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

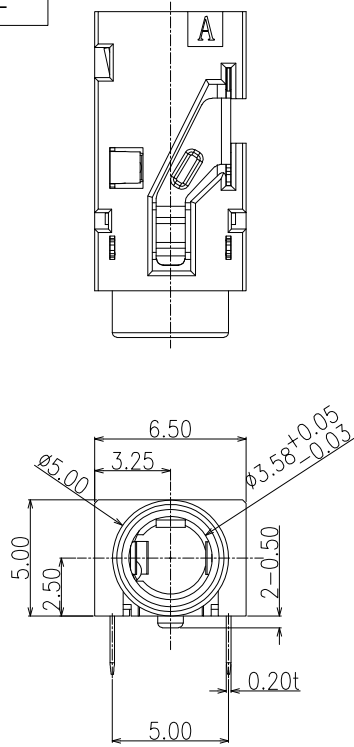

3D VIEW

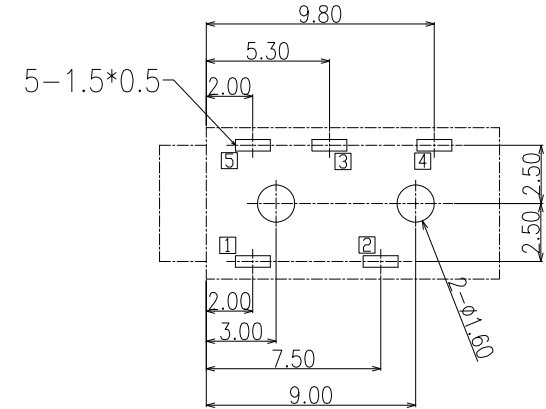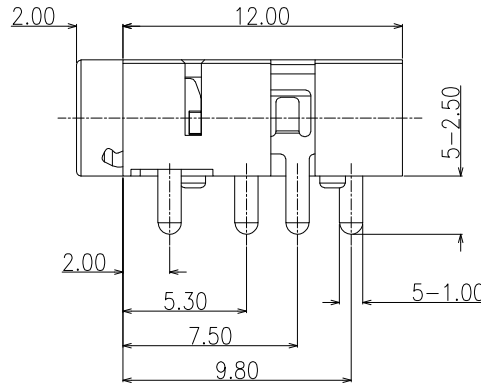

P.C.B LAYOUT
TOP VIEW

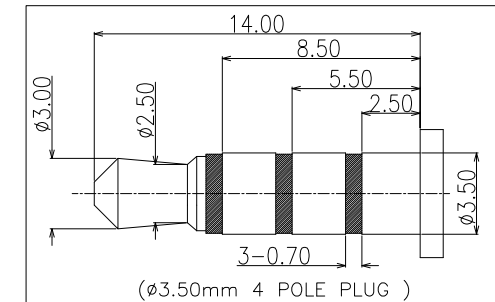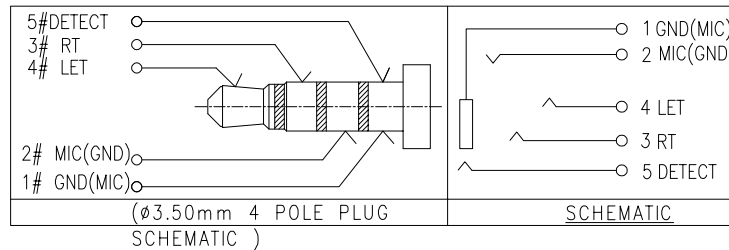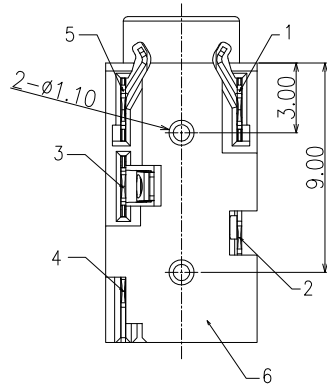

(ø3.50mm 4 POLE PLUG)

UNLESS OTHERWISE
SPECIFIED TOLERANCES

东莞市文章济美电子有限公司

6	HOUSING	1	HIGHT TEMPERATURE PLASTIC COLOR BLACK	
5	CONTACT 5#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE TIN PLATING.	T=0.2mm
4	CONTACT 4#	1	STAINLESS STEEL; THE BOTTOM OF THE NICKEL; THE WHOLE TIN PLATING.	T=0.2mm
3	CONTACT 3#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE TIN PLATING.	T=0.2mm
2	CONTACT 2#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE TIN PLATING.	T=0.2mm
1	CONTACT 1#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE TIN PLATING.	T=0.2mm
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	
X.XXX	±0.10	X.XXX	

DWG NO.	Lucky	PART NAME: ø3.5mm PHONE JACK H=5.0 mm DIP TYPE CONNECTOR	
DESIGN:	2018.03.22		
CHECK:		PART NO. PJ35A046-F05T1BP-A	
APPROVED	Lucky 2018.03.22	REV. A	UNIT: mm SHEET: 1/1