
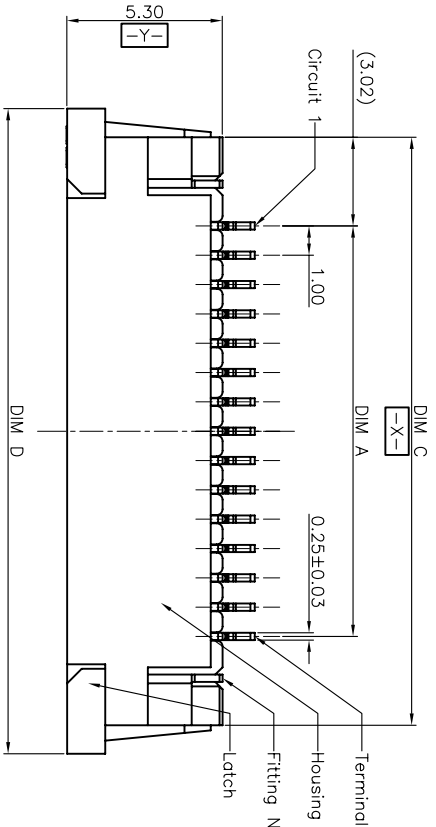
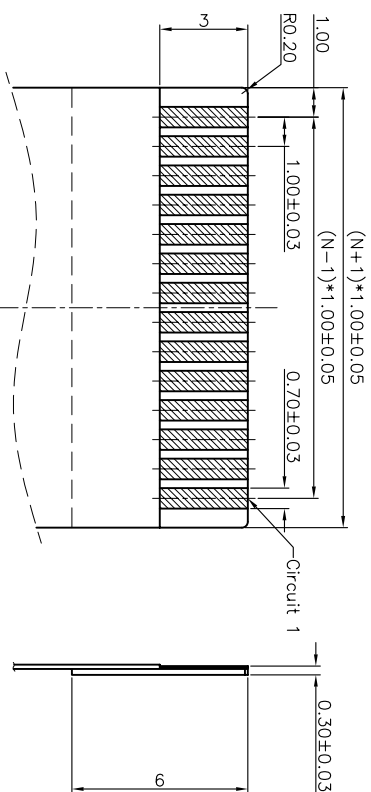
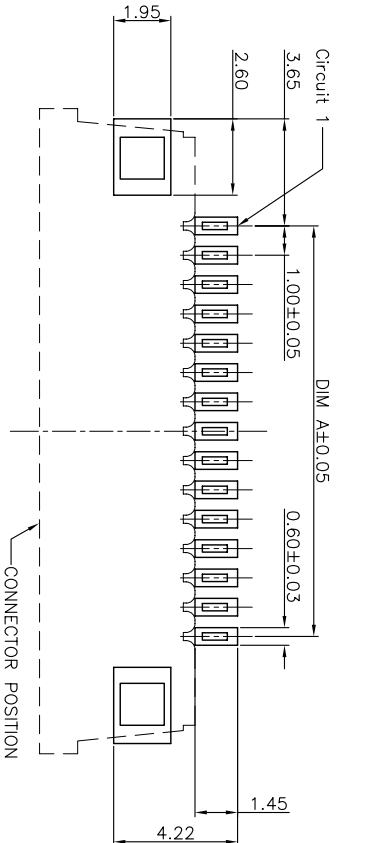



- Note:
- Material:
 - Housing: thermoplastic high temp.UL94V-0; Color: natural.
 - Latch: thermoplastic high temp.UL94V-0; Color: black.
 - Terminal: copper alloy.
 - Fitting Nail: copper alloy.
 - Finish:
 - Terminal:
 - Underplating: Au/matt Tin overall.
 - Fitting Nail:
 - Underplating: matt Tin overall.
 - Product must comply HF RoHS specification.
 - Product No.
 - 5001-FCS 10 25 -** R 1.00
- ALTERNATE
PACKING:R;卷;T;管
PIN
HIGH:2.5
PITCH:1.0
抽屜上接
JME CONNECTOR SERIES

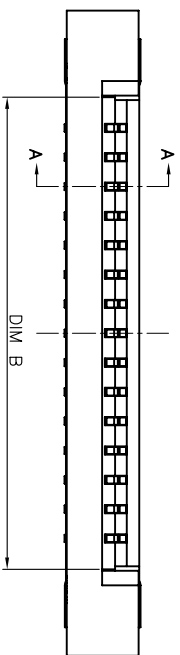

RECOMMENDED P.C.B PATTERN LAYOUT

RECOMMENDED PFC/FC DIMENSION

CKTS	DIM A	DIM B	DIM C	DIM D
4	3.00	5.10	9.05	11.00
5	4.00	6.10	10.05	12.00
6	5.00	7.10	11.05	13.00
7	6.00	8.10	12.05	14.00
8	7.00	9.10	13.05	15.00
9	8.00	10.10	14.05	16.00
10	9.00	11.10	15.05	17.00
11	10.00	12.10	16.05	18.00
12	11.00	13.10	17.05	19.00
13	12.00	14.10	18.05	20.00
14	13.00	15.10	19.05	21.00
15	14.00	16.10	20.05	22.00
16	15.00	17.10	21.05	23.00
17	16.00	18.10	22.05	24.00
18	17.00	19.10	23.05	25.00
19	18.00	20.10	24.05	26.00
20	19.00	21.10	25.05	27.00
21	20.00	22.10	26.05	28.00
22	21.00	23.10	27.05	29.00
23	22.00	24.10	28.05	30.00
24	23.00	25.10	29.05	31.00
25	24.00	26.10	30.05	32.00
26	25.00	27.10	31.05	33.00
27	26.00	28.10	32.05	34.00
28	27.00	29.10	33.05	35.00
29	28.00	30.10	34.05	36.00
30	29.00	31.10	35.05	37.00

CUSTOMER DRAWING

Tolerance Unspecified
(未注公差)

Size(规格):
A4

Unit(单位):
MM

Scale(比例):
1:1

Project View
(投影视图)

Page(页数):
1 of 1

深圳市文章济美科技有限公司
Shenzhen WenZhangJiMei technology co., LTD

Product Name(产品名称):
1.0Pitch H=2.5 PFC ZIF R/A Upper TypeK1 SMT CONN



Product No(产品料号):
5001-FCS1025-**-R1-00

Designer(设计):
Checked(审核):
Approved(核准):


Rev
版本

Change Description
变更内容




A	初版发行	2011/03/23	Altan
Rev	Change Description	Date	Revision
版本	变更内容	日期	制/修订人

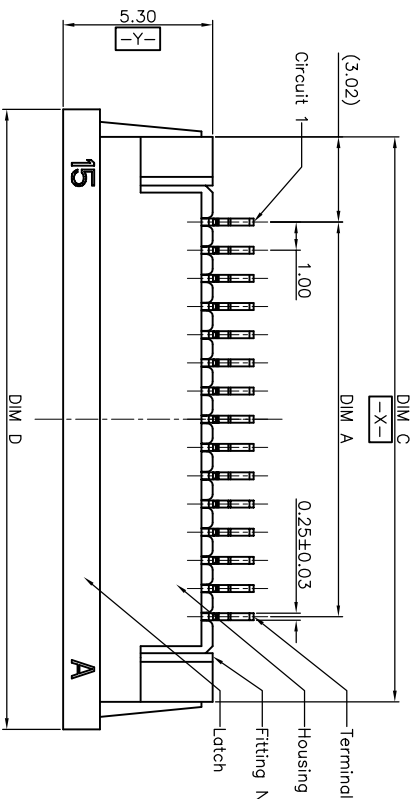


SECTION A-A
SCALE 1:1

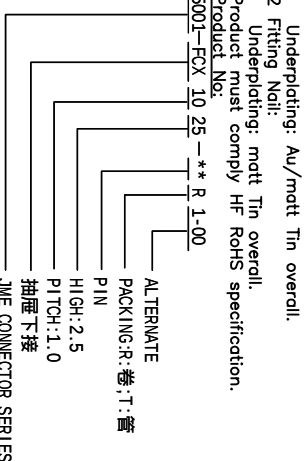

- Note:
1. Housing: thermoplastic high temp. UL94V-0; Color: natural.
 - 1.2 Latch: thermoplastic high temp. UL94V-0; Color: black.
 - 1.3 Terminal: copper alloy.
 - 1.4 Fitting Nail: copper alloy.
 2. Finish:
 - 2.1 Terminal: Underplating: Au/matt Tin overall.
 - 2.2 Fitting Nail: Underplating: matt Tin overall.
 3. Product must comply HF RoHS specification.
 4. Product No.

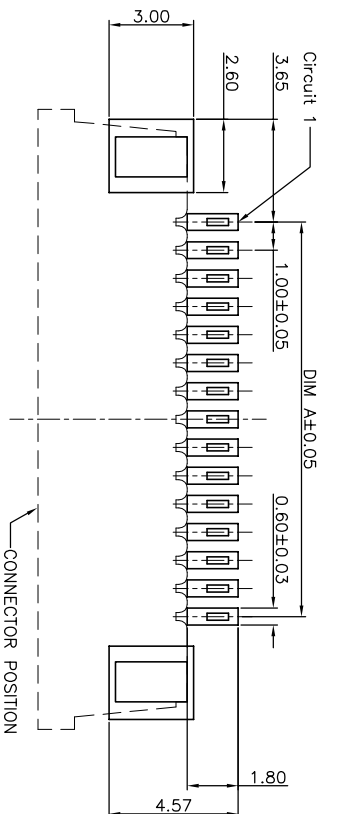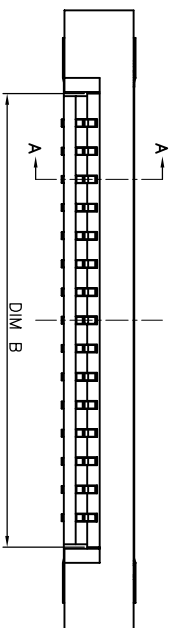

RECOMMENDED P.C.B. PATTERN LAYOUT

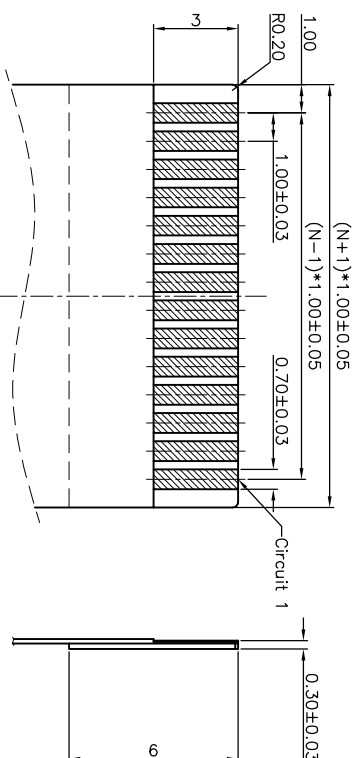

RECOMMENDED PFC/PFC DIMENSION

CKTS	DIM A	DIM B	DIM C	DIM D
4	3.00	5.10	9.05	11.00
5	4.00	6.10	10.05	12.00
6	5.00	7.10	11.05	13.00
7	6.00	8.10	12.05	14.00
8	7.00	9.10	13.05	15.00
9	8.00	10.10	14.05	16.00
10	9.00	11.10	15.05	17.00
11	10.00	12.10	16.05	18.00
12	11.00	13.10	17.05	19.00
13	12.00	14.10	18.05	20.00
14	13.00	15.10	19.05	21.00
15	14.00	16.10	20.05	22.00
16	15.00	17.10	21.05	23.00
17	16.00	18.10	22.05	24.00
18	17.00	19.10	23.05	25.00
19	18.00	20.10	24.05	26.00
20	19.00	21.10	25.05	27.00
21	20.00	22.10	26.05	28.00
22	21.00	23.10	27.05	29.00
23	22.00	24.10	28.05	30.00
24	23.00	25.10	29.05	31.00
25	24.00	26.10	30.05	32.00
26	25.00	27.10	31.05	33.00
27	26.00	28.10	32.05	34.00
28	27.00	29.10	33.05	35.00
29	28.00	30.10	34.05	36.00
30	29.00	31.10	35.05	37.00

CUSTOMER DRAWING



深圳市文章济美科技有限公司
Shenzhen WenZhangJiMei technology co., LTD

Tolerance Unspecified

Size (mm)

Unit (mm)

Product Name (产品名称)

1.0 Pitch H=2.5 FPC ZIF R/A Lower TypeK1 SMT CONN

Scale (比例)

Product No (产品料号)

5001-FCX1025-**-R1-00

Project View (投影图)

1 OF 1

Page (页数)

1 OF 1

Rev (版本)

A

Designer (设计)

Allan 03/23/11

Checked (审核)

Approved (核准)

Rev	Change Description	Date	Author
A	初版发行	2011/03/23	Allan
版本	变更内容	日期	制/修订人